


19" Managed Ethernet Switch

RFIR-127-F4G-T7G-DC

- ⌘ High performance and configurable
 - 27 ports including 11 gigabit ports
 - Powerful dual core CPU
 - Advanced WeOS layer 2 functionality
- ⌘ Designed for demanding Edge Network applications
 - Low power consumption DC power supply
 - Highly configurable fault I/O contact
 - Ultra-robust IP40 19" rack/wall-mount housing
- ⌘ Robust and reliable for long service life
 - 275 000 hours MTBF to MIL-HDBK-217K
 - -40 to +70°C without ventilation holes
 - Industrial and trackside type tested
- ⌘ Unique future proof industrial networking solutions
 - Simple web configuration with professional CLI
 - Multiple network resilience solutions
 - Fast reconnect for multicast protocols

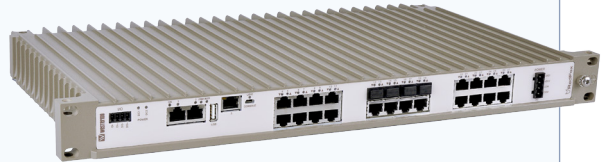

EN 50121-4
Railway Trackside

EN 55022
ITE Emission

EN 55024
ITE Immunity

EN 61000-6-1
Residential Immunity

EN 61000-6-2
Industrial Immunity

EN 61000-6-4
Industrial Emission

The RFIR (RedFox Industrial Rack) is a high performance layer 2 industrial Ethernet switch designed for high network traffic applications. Various port configurations are available that can be further customised with SFP transceivers. RFIR is powered by the Westermo WeOS network operating system.

RFIR is designed for 19" cabinets according to ETSI standard making it suitable for use in control room networks as well as for cabinets installed along railway trackside installations. RFIR is designed to run efficiently from a DC power supply, the unit is also equipped with configurable I/O fault contact that make it ideal for easy installation and monitoring in industrial applications.

Only industrial grade components are used which gives RFIR an MTBF of 275 000 hours that ensures a long service life. A wide operating temperature range -40 to +70°C (-40 to +158°F) can be achieved with no moving parts or cooling holes in the case. RFIR has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside application.

WeOS has been developed by Westermo to allow us to offer cross platform and future proof solutions. WeOS can deliver 20 ms ring recovery performance even for networks with video or EtherNet/IP traffic.


For more WeOS functionality, please see the WeOS datasheet.

Ordering Information

| Art.no | Description |
|-----------|--|
| 3641-4020 | RFIR-127-F4G-T7G-DC, Managed Ethernet switch |

RFIR-127-F4G-T7G-DC

Dimensional drawing

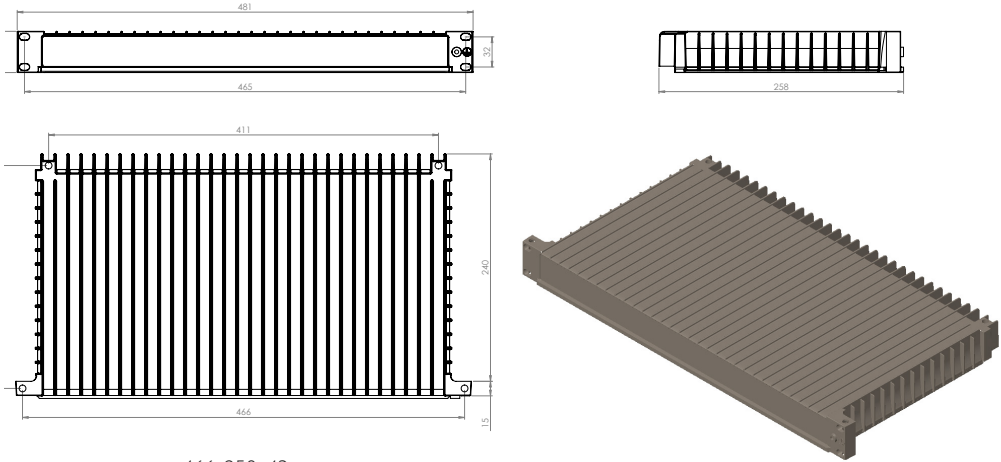

Dimension 466x258x43 mm

Weight 3,8 kg

Degree of protection IP 40

Power

| | |
|-------------------|---|
| Operating voltage | 16 to 60 VDC |
| Rated current | 1.0 (1.2*)A @ 24 VDC 0.47 (0.54*) A @ 48 VDC |

Interfaces

| | |
|-------------|--|
| Console | 1 x USB Micro-B connector |
| USB | 1 x USB 2.0 host interface |
| Digital I/O | 1 x 4-ports detachable screw terminal |
| Ethernet | 7 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 x 100 or 1000 Mbit/s, pluggable connections, Ethernet FX or TX SFP 16 x 10/100 Mbit/s, Ethernet TX, RJ-45 |

Temperature

| | |
|-----------------------------|--------------------------------------|
| Operating | -40 to +70°C (-40 to +158°F) |
| Storage & Transport | -40 to +85°C (-40 to +185°F) |
| Maximum surface temperature | 135°C (275°F) (temperature class T4) |

Agency approvals and standards compliance

| | |
|--------|---|
| EMC | EN 50121-4, Railway applications - Electromagnetic compatibility - Emission and immunity of the signalling and telecommunications apparatus |
| | EN 55022, Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |
| | EN 55024, Information technology equipment - Immunity characteristics - Limits and methods of measurement |
| | EN 61000-6-1, Electromagnetic compatibility - Immunity for residential, commercial and light-industrial environments |
| | EN 61000-6-2, Electromagnetic compatibility - Immunity for industrial environments |
| | EN 61000-6-4, Electromagnetic compatibility - Emission for industrial environments |
| | FCC Part 15 Class A |
| | IEC 62236-4, Railway signalling and telecommunications apparatus |
| Safety | UL/IEC/EN 60950-1, IT equipment |
| Marine | DNV GL rules for classification – Ships and offshore units |